Digital ASCs for Air Handling Units, AHU-5001 thru AHU-5018 Enclosures, EN-4X1XX and EN-4X1XX

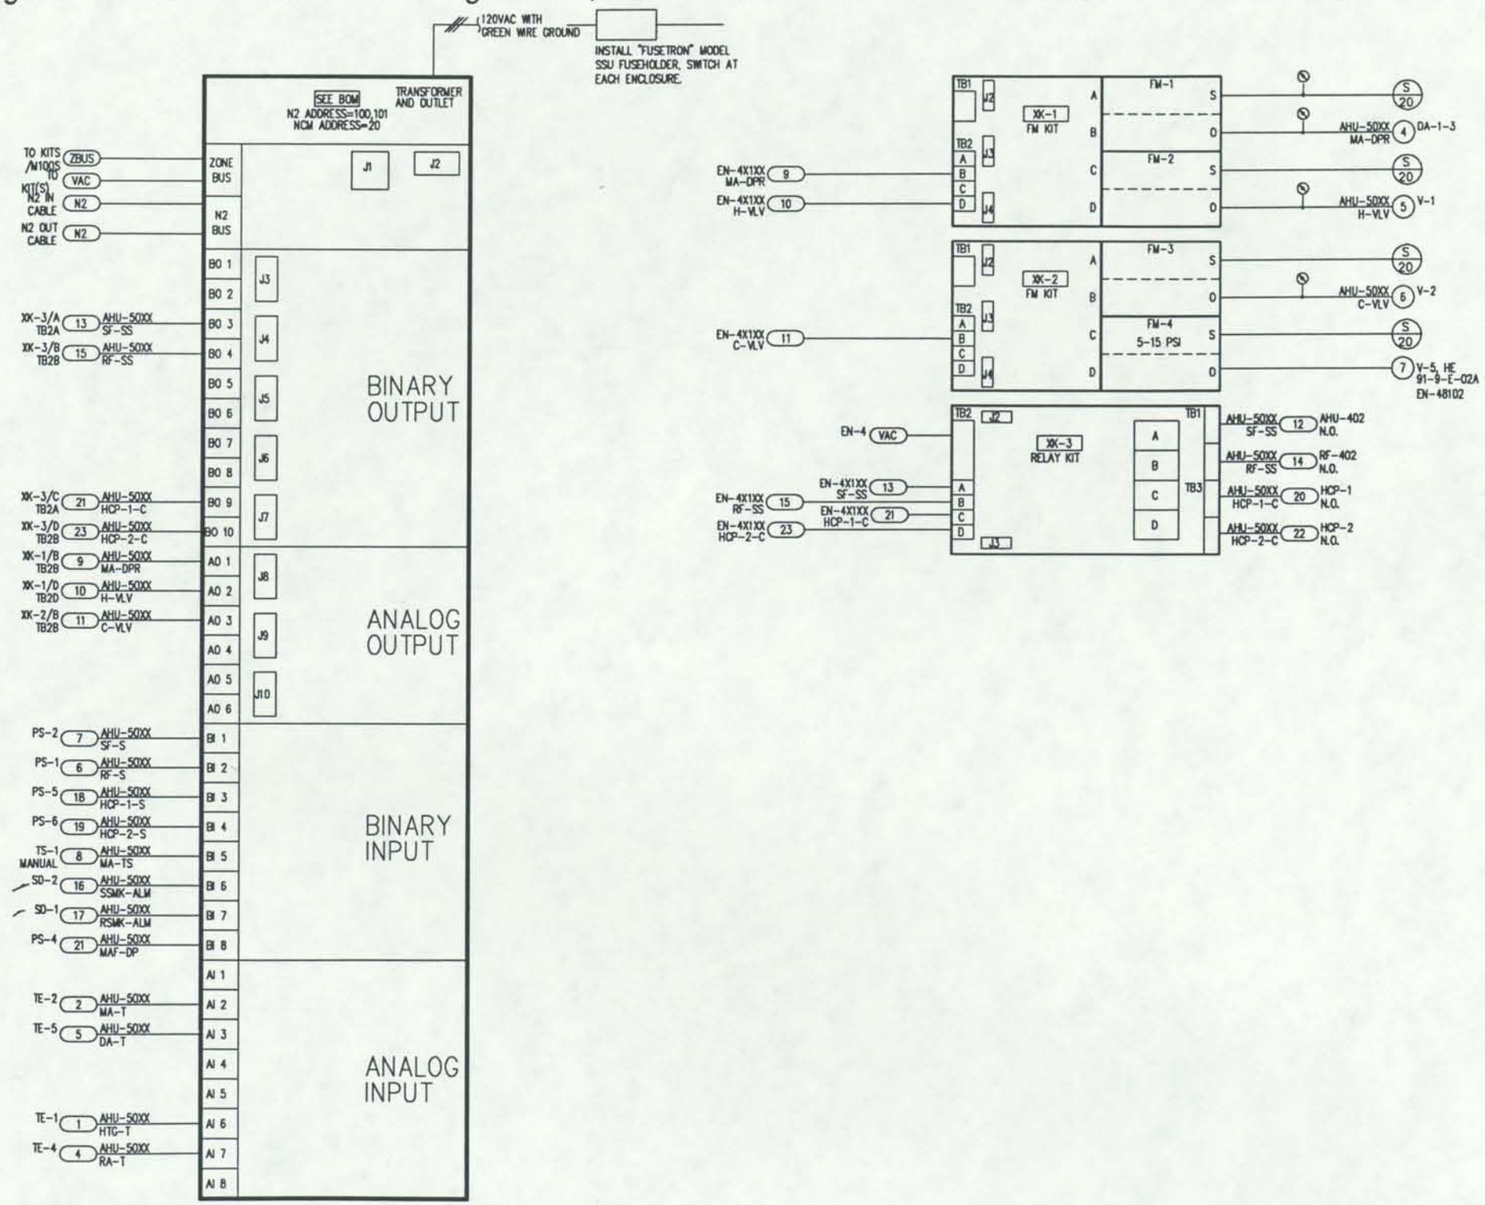

PANEL MATERIAL

	DEVICE TAG	QTY	CODE NUMBER	DESCRIPTION
(P)	FM-1-FM-4	55	FM-DAP102-0	DAP MANUAL MODULE
		55	FM-DAP103-0	E/P OUT FM FOR ASC
(P)	EN-4X1XX	18	AS-AHU101-0	AIR HANDLING UNIT ENC/TER
		18	AS-AHU102-0	AIR HANDLING UNIT LOGIC B
		18	EN-ENC200-0	16 X 38 ENCLOSURE FOR ASC
		18	AS-XFR100-0	100VA TRANSFORMER KIT
(P)	XX-1-XX-2	36	AS-FMK100-0	FUNCTION MOD KIT-4 SLOTS
(P)	XX-3	18	AS-RLY100-0	LINE VOLTAGE RELAY KIT
(P)	FM-4-FM-5	36	FM-KIT127-0	EMPTY FM SLOT COVER PIECE
(P)	ACC	72	G-2010-101	0-30 PSI, 2 INCH PRESSURE GAUGE
(P)	ACC	72	M-8000-391	ONE LINE TAG

NOTES:

1. ALL MATERIAL WITH (P) PRECEEDING THE DEVICE TAG IN THE BILL OF MATERIAL IS PROPRIETARY AND IS BEING SUPPLIED BY JOHNSON CONTROLS, INC. ALL OTHER MATERIAL IS NON-PROPRIETARY.

2. POTEAU PANEL FACILITY

M-8000-391 TEXT INFORMATION

PNEUMATIC TUBE DESIGNATION	TEXT ON M-8000-391
S/20	CONTROL AIR SUPPLY
4	MIXED AIR DAMPERS
5	HEATING WATER CONTROL VALVE
6	COOLING WATER CONTROL VALVE

FILE: EN-40100

DRAWING TITLE					
Enclosures EN-4X1XX,4X1XX AHU100-0 ASC Controller Digital ASC for AHU-5001 Thru and AHU-5018			RECORD	05/20/94	SF
		2	HE AT SEG 17/18	03/03/94	SF
		1	GENERAL	08/03/92	SF
	REFERENCE DRAWING	NO.	REVISION-LOCATION	ECN DATE	BY

SALES ENGR	PROJECT MGR	APPL. ENGR	DRAWN	APPROVED
JP	SF	DCS	BY SF DATE 02/14/92	BY DATE

PROJECT
The Argonne National Labs
Advanced Photon Source Campus
9700 Cass Avenue South
Argonne, IL 60439

JOHNSON CONTROLS
Systems & Services Division

3007 MALMO ROAD
ARLINGTON HEIGHTS
ILLINOIS 60005
708/364-1500 Main
708/806-4438 Eng

CONTRACT NUMBER 91390-0009

DRAWING NUMBER 91-9-E-02B

COPYRIGHT JOHNSON CONTROLS, INC. 1993